




1.22.10 CORE PLUGGING MACHINE



CUTTING / CORING

COATING / EMBEDDING

BONDING

GRINDING

LAPPING

POLISHING



DESCRIPTION

The **1 22 10** Geological Core Plugging machine is designed to drill plugs from cores of Ø 10 to 15 cm and in 1 meter long, or from blocks of a similar size.

The machine can drill plugs up to Ø150mm.

A swivel joint with a tap allows internal irrigation of the core drill. A hose fitted with a tap allows external irrigation of the core drill.

The 12 speed can be adjusted by repositioning the belt (150 rpm - 2,840 rpm).

This machine is designed to be used only with diamond tools.

CHARACTERISTICS

Electrical

Power supply: 400 V three phase 50 / 60 Hz (others on request)

Spindle motor: 0.55 KW

Pump motor: 150 W (recycling only)

Spindle 12 speed: 150 to 2,840 rpm

Electrical safety features :

- pulley housing
- emergency stop


Capacity

Maximum coring depth: 115 mm

Table adjustable in both height and rotation

Table can be tilted through $\pm 45^\circ$

Noise level: < 70 db

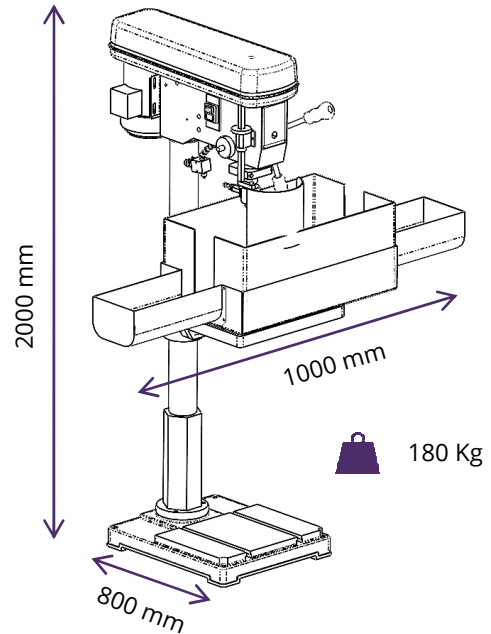

STANDARD EQUIPMENT

- 1 clamping stand
- 1 adjustable tilting table
- 1 protective housing

OPTION

- Recycling bin with pump



Updated in august 2020

AERI BROTLAB

230 / 250 route de Savignies - 60650 LE MONT SAINT ADRIEN - FRANCE

Tel : + 33 (0)3 44 82 88 88 - Fax : +33 (0)3 44 13 02 2 - Email : commercial@brotlab.com

SAS capital de 300 000 € - Siret : 40278098500055

BROTLAB®